

Pure Performance™ by Nor:disk

D2 Core

Hood-type dishwasher



Hood-type dishwasher
H x W x D : 1450/1940 x 655 x 745 mm



4 wash programs

- Glasses 1 min
- Plates 2 min
- Cutlery 3 min
- Utensils 8 min



Dosing equipment & drain pump
Drain pump and integrated dosing equipment for liquid detergent and rinse aid are included in standard delivery.



Instant access to information
Scan the QR code for online access to servicing history, user and service manuals or troubleshooting guides.

That's SIMpel™!



Top level hygiene
The Water-Smart range delivers top wash results that complies with the EN 17735:2023 hygiene norms.



D2 Core hood-type dishwasher
Art. no. 31205



Dishware wash rack
500 x 500 mm
Included in standard delivery.
Art. no. 28148



Glassware wash rack
500 x 500 mm
Included in standard delivery.
Art.no. 28149



Cutlery holder
105 x 105 x 140 mm
Included in standard delivery.
Art.no. 28150

NORDISK
CLEAN SOLUTIONS

D2 Core technical specifications

General

Design	Hood type dishwashing machine Wash rack size: 500 x 500 mm Single skin cabinet
External dimensions H x W x D	1940 x 655 (handle +100) x 745 (handle +95) mm
Clearance (Loading height)	430 mm (405 mm)
Weight (empty/filled)	108 / 150 kg
Wash tank volume	30 litres
Rinse tank volume	12 litres
Rinse water volume	2.8 litres
Wash/rinse water temperature	60/85 °C
Sound pressure level	< 68 dB(A) ISO 11203

Programs & capacity

Wash programs	1 min / 2 min / 3 min / 8 min
Capacity/wash program	18 Dinner plates or 12 Soup plates Ø 240 mm 25 Glasses/mugs Ø 90 mm
Start-up time	12 min. at 55 °C inlet water temperature

Electrical connection ①

Voltage	380/400/415V/ 3N~ / 50 Hz 230V/ 3N~ / 50 Hz
Fuse	16 A (400V) / 25 A (230V)
Maximum output	8.52 kW
Dishwashing pump	0.52 kW
Rinse pump	0.18 kW
Heater wash/rinse tank*	8 kW / 8 kW
Enclosure rating	IPX5

Water connection ②

Hardness/Connection	Total hardness: < 4 °dH; 7 °f; 70 PPM Inlet hose with ¾" female - 1.4 m 200 - 500 kPa (2 - 5 bar)
Max. inlet water temperature	60 °C
Backflow protection	EN 1717 is fulfilled with type AB air gap, EN 13077

Ventilation & Drain ③

Heat dissipation	4.5 kW/ 2.0 kW/ 2.5 kW (total/sensible/latent)
Ventilation requirement	500 m³/h
Drainage	Drain hose Ø 28 mm, 1.5 m, capacity 50 l/min
Drain water temperature	65 °C
Integrated drain pump	40 W, Lift capacity: 800 mm

Detergent & rinse aid

Dosing equipment	Liquid detergent and rinse aid dosing dispensers with peristaltic pump are integrated in the machine
------------------	--

* Not in use simultaneously.

Technical drawing


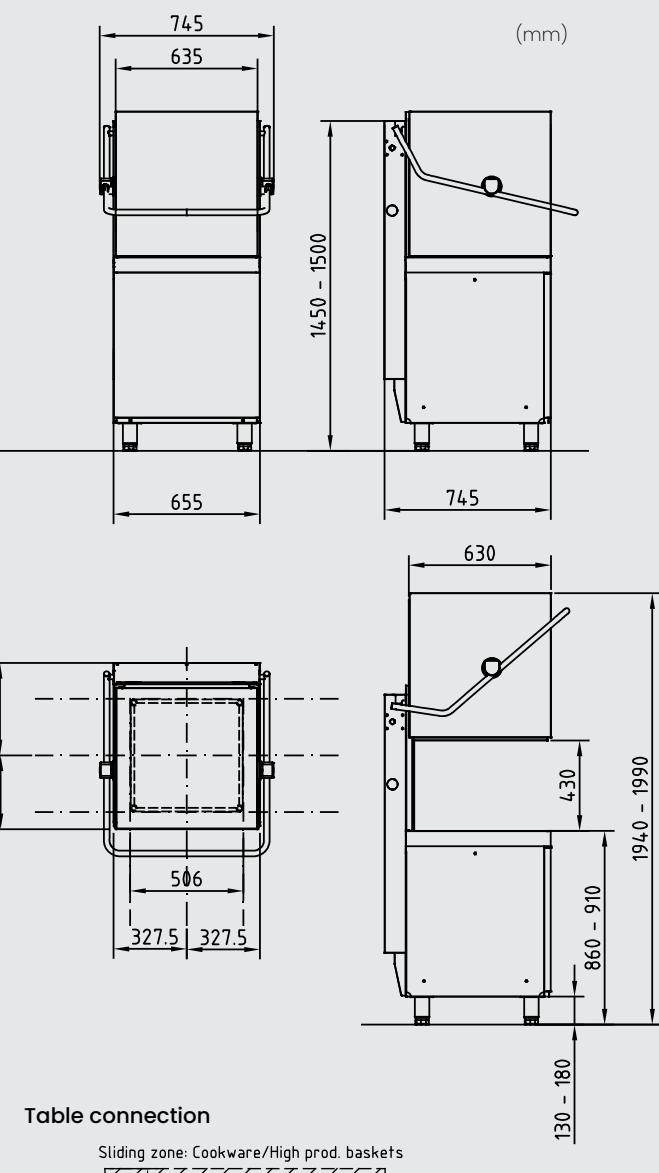


Table connection

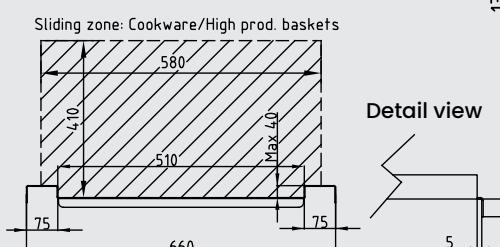

2-year
warranty

24

Enjoy a contractual
24-month warranty on
your new Nor:disk ware
washing solution.

Annual service must be
performed by your local
authorized service partner.

NORDISK
CLEAN SOLUTIONS

www.nordiskclean.com